

MULTI-LAYER DIELECTRIC FILTER

ADFC13 Series

*RoHS COMPLIANT



3.2 x 1.6 x 1.2mm


STANDARD SPECIFICATIONS:

Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Impedance @ Input/Output	50Ω
Reliability (MTBF)	1x10 ⁻⁶ /pc.hr

ADFC13-2450 - C

CHARACTERISTICS	UNIT	TYP.
Center Frequency Fc	MHz	2450
Bandwidth	MHz	+/-50.0
Insertion Loss	dB	≤1.4
Ripple	dB	≤0.6
V.S.W.R.	BW	≤2.0
Relative Attenuation		
902 ~ 928 MHz	dB	≥30
1500 ~ 1550 MHz	dB	≥35
2050 ~ 2100 MHz	dB	≥6
4800 ~ 5000 MHz	dB	≥20

OUTLINE DRAWING:

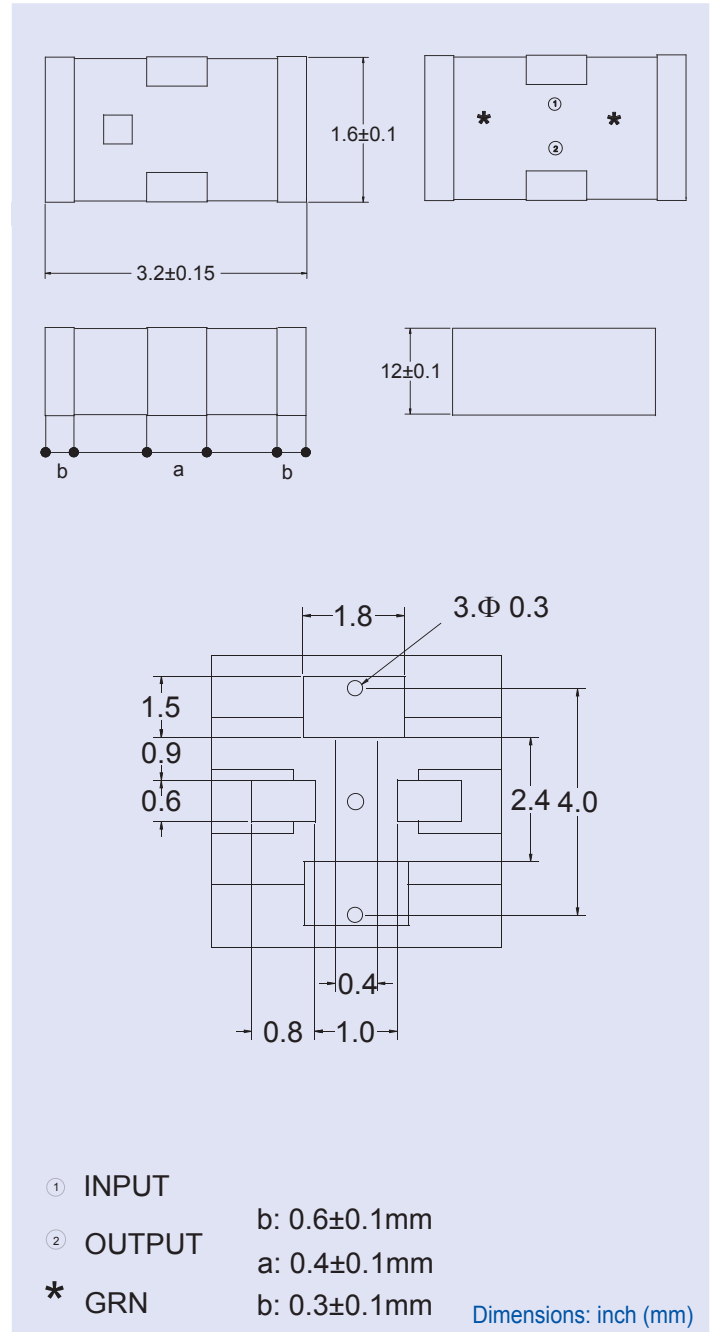

PACKAGING: -T= Tape and Reel (1,000pcs/reel)