

HCMOS/TTL COMPATIBLE SURFACE-MOUNT PROGRAMMABLE CRYSTAL CLOCK OSCILLATOR

AP5S





RoHS
Compliant



5.0 x 3.2 x 1.2mm


OUTLINE DRAWING:

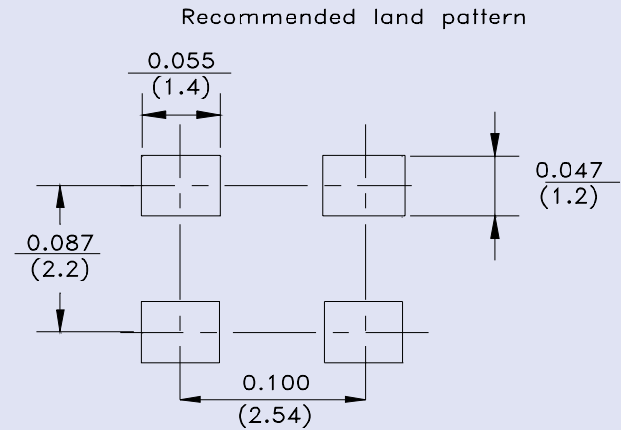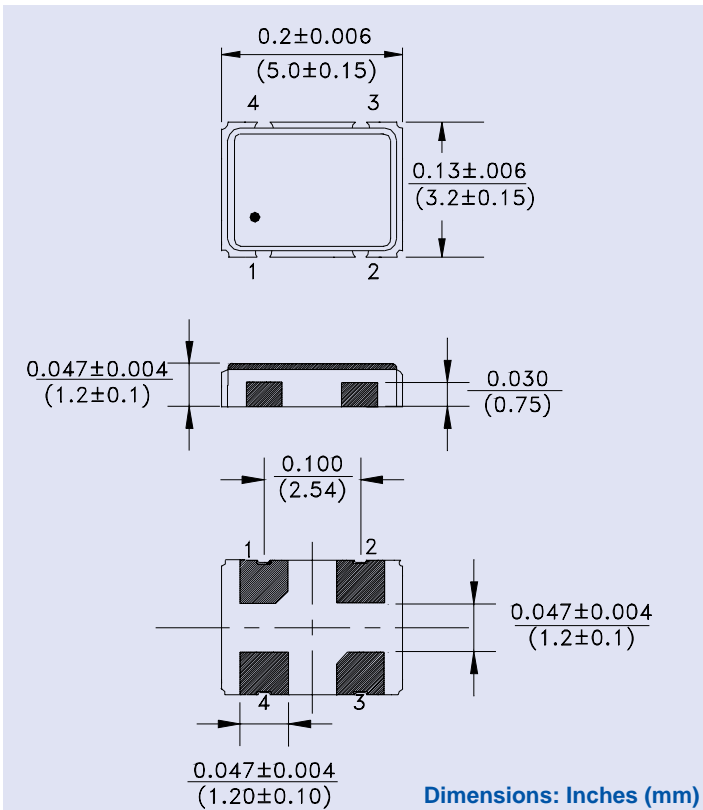

PIN	CONNECTION
# 1	OE
# 2	GND/CASE
# 3	OUTPUT
# 4	VDD

Note: It is recommended to use an approximately 0.01uF bypass capacitor between PIN 2 and 4.

TAPE & REEL:

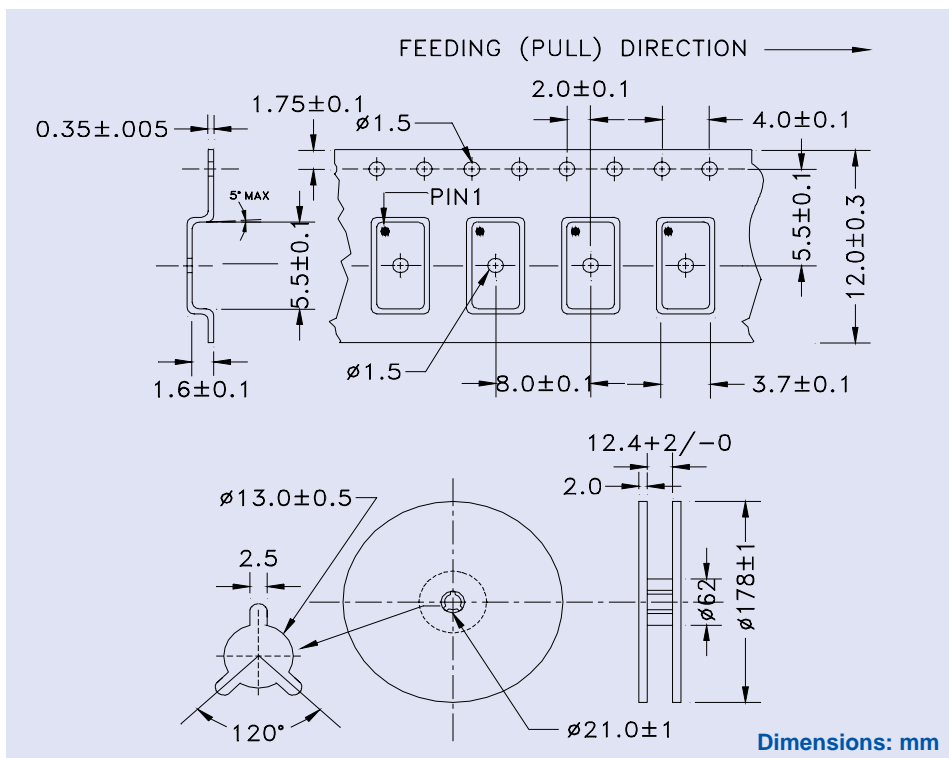

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



Revised: 1.04.08
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com