HCMOS / TTL COMPATIBLE SURFACE-MOUNT PROGRAMMABLE CRYSTAL CLOCK OSCILLATOR

AP7S

RoHS Compliant



7.0 x 5.0 x 1.6mm

OUTLINE DRAWING:

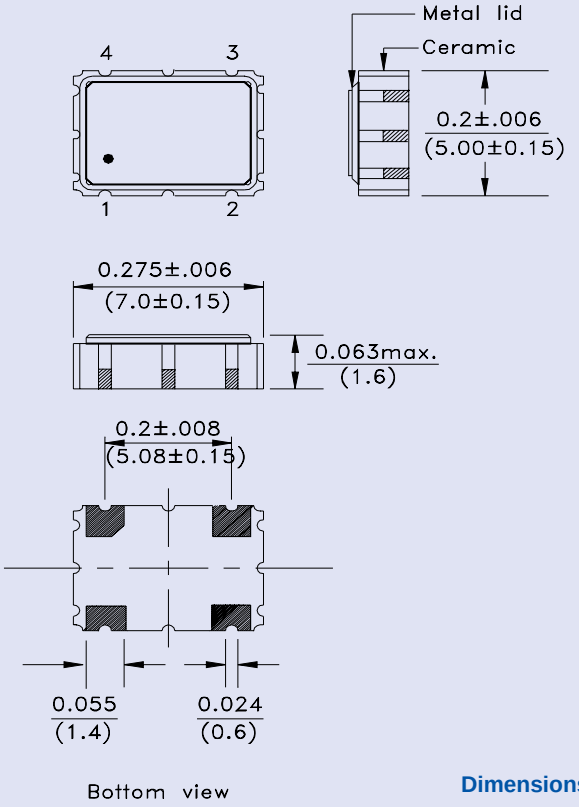

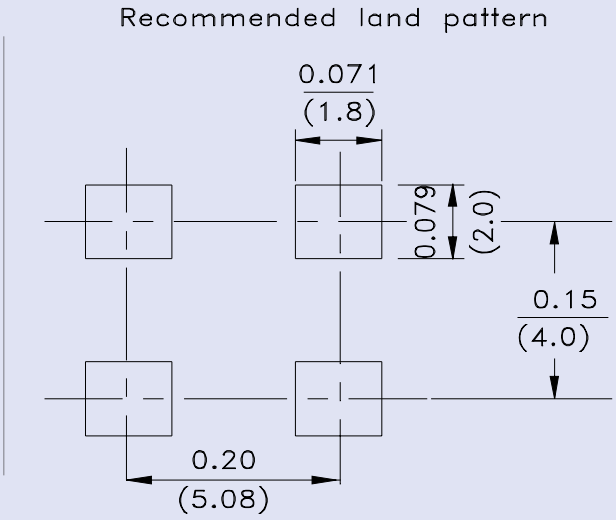

Dimensions: Inches (mm)

PIN	CONNECTION
# 1	OE
# 2	GND/CASE
# 3	OUTPUT
# 4	VDD

Note: It is recommended to use an approximately 0.01uF bypass capacitor between PIN 2 and 4.

TAPE & REEL:

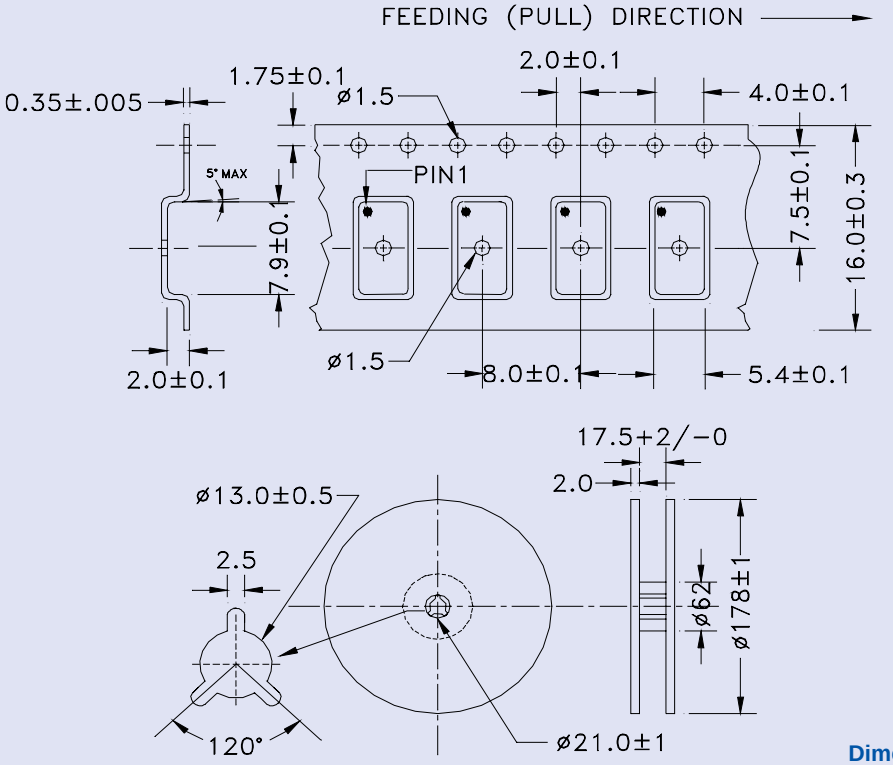

Dimensions: mm

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com