# 32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

## ASHK SERIES

4.0 x 2.5 x 0.9 mm

Pb RoHS Compliant

## OUTLINE DRAWING:

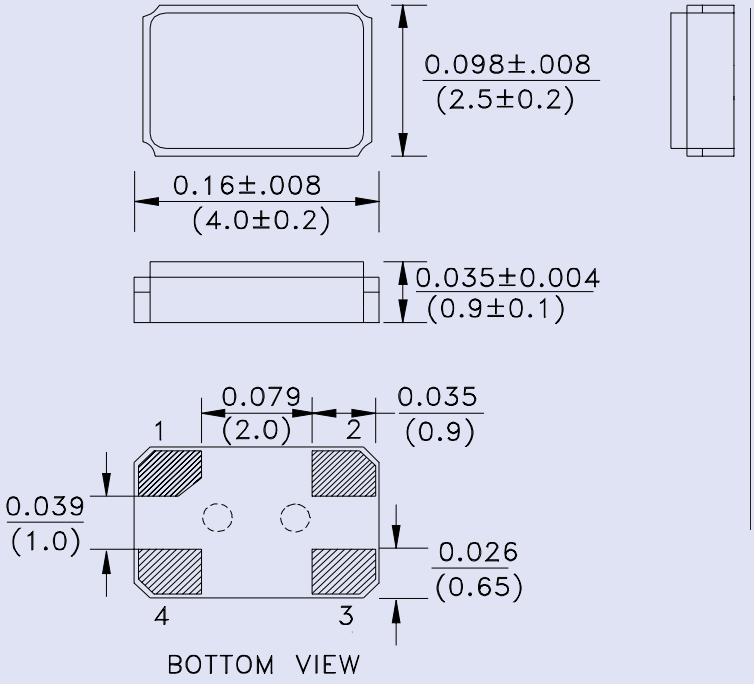


Dimensions: Inches (mm)

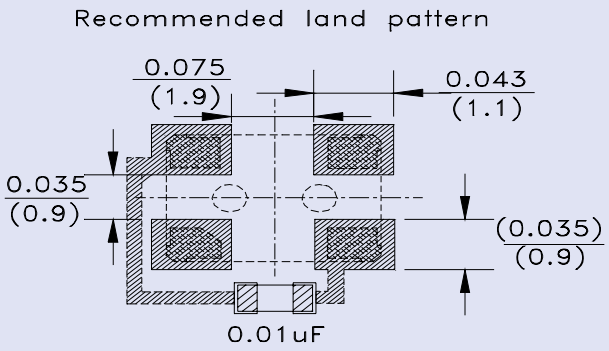


Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

| PIN | FUNCTION |
|---|---|
| 1 | Tristate |
| 2 | GND/Case |
| 3 | Output |
| 4 | Vdd |

Please remain pin 1 "High" if you do not use the Tri-state function.

## TAPE & REEL: Tape and reel 1,000pcs/reel

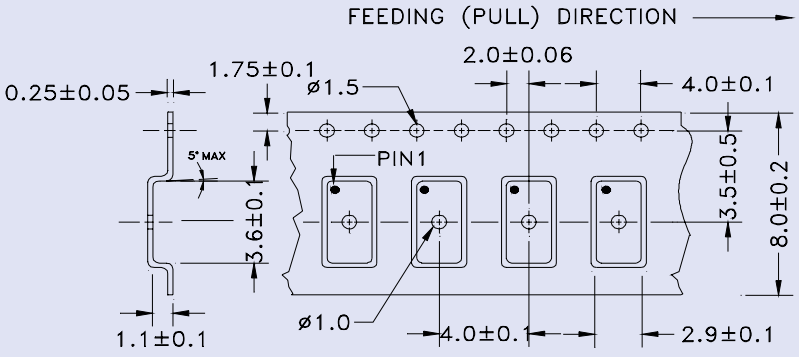


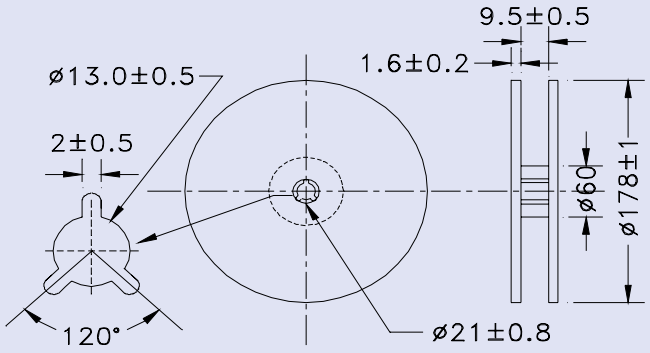


Dimensions: mm

Please contact ABRACON for more information.



30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com