

# 2085MHz VOLTAGE CONTROLLED OSCILLATOR

ACRO-200-2085



Dimensions: 0.91 x 0.91 x 0.22in

## STANDARD SPECIFICATIONS:

	Min	Typ	Max	Units	Cond.
Frequency Range	1680		1720	MHz	1
Tuning Voltage	1		10	V	1
Modulation Sensitivity	3.5		11.5	MHz/V	3
Operates with Vtune = 0V					3
Output Power	4		11	dBm	1
Phase Noise					
1KHz Offset			-85	dBc/Hz	2
10KHz Offset			-115	dBc/Hz	3
100KHz Offset			-138	dBc/Hz	2
1MHz Offset				dBc/Hz	2
Pushing			2	MHz/V	3
Pulling (14 db R.L.)			25	MHz	3
Modulation Bandwidth:			5	MHz	4
Tuning Port Capacitance			50	pF	2
Harmonics				dBc	3
Sub-Harmonics	2 <sup>nd</sup>		-15	dBc	3
	3 <sup>rd</sup>		-15	dBc	3
	4 <sup>th</sup>		-15	dBc	3
Vcc	7.5	8	8.5	V	5
Icc			40	mA	5
Operating Temperature	-40		+85	C	3
Package		0.91		inch sq.	5

## COND. NOTES:

1. Tested in production
2. Per current design, not a tested parameter
3. Sample tested from production lot
4. Not a tested or guaranteed design goal
5. By inspection

## MARKING:

- 2450
  - ACV2ZY
- (Z for month, Y for year  
ex. D3 for April 2003)

## NOTES:

1. Except for output pins, bottom is solid ground plane
2. All dimensions in mils.
3. All holes are plated through


LABEL ARROW POINTS TO RF OUT

### PINOUT

P3 = RF OUT  
P11 = Vtune  
P15 = Vcc  
ALL OTHER PINS = GND

OPTION T for Tape and Reel

## OUTLINE DRAWING:

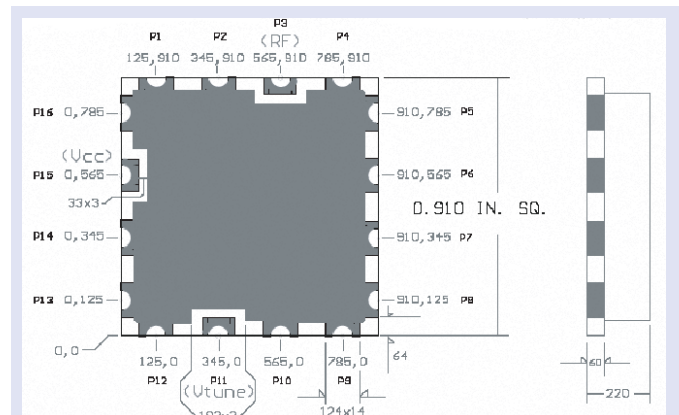

Dimensions: inch (mm)

ABRACON IS  
ISO 9001 / QS 9000  
CERTIFIED

rev1.1-9/05



30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com