
303.875MHz SMD One Port SAW Resonator

ASR303.875A01-SE





FEATURES:

- Low insertion loss 2.5dB max
- 5.0 x 5.0 x 1.5mm package
- 50Ω impedance termination
- Suitable for RoHS compliant reflow

> APPLICATIONS:


- Wireless remote controller
- Mobile communication


STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency (f ₀)	303.800	303.875	303.950	MHz	
Insertion Loss		1.5	2.5	dB	
Quality Factor		12,000			Unloaded Q
		2,000			50Ω loaded Q
Turnover Temperature	15	25	30	°C	
Freq. Temp. Coefficient		0.032		ppm/°C	
Frequency Aging		<±10		ppm/yr	
DC Insulation Resistance	1.0			ΜΩ	
Motional Resistance R1		12	19	Ω	
Motional Inductance L1		94		uН	
Motional Capacitance C1		29		fF	
Shunt Static Capacitance C0	2.7	3.0	3.3	pF	
Operation Temperature Range	-40		+80	°C	
Storage Temperature Range	-45		+85	°C	
DC Voltage			10	Vdc	
Source Power			0	dBm	

EQUIVALENT LC MODEL

TEST CIRCUIT

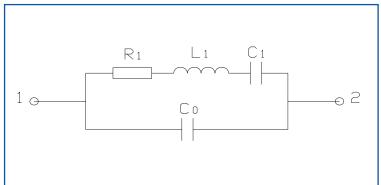

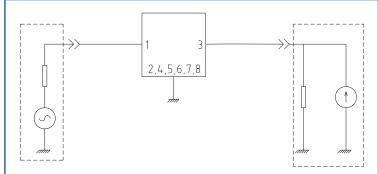





ASR303.875A01-SE SMD One Port SAW Resonator

ASR303.875A01-SE







OUTLINE DIMENSIONS:

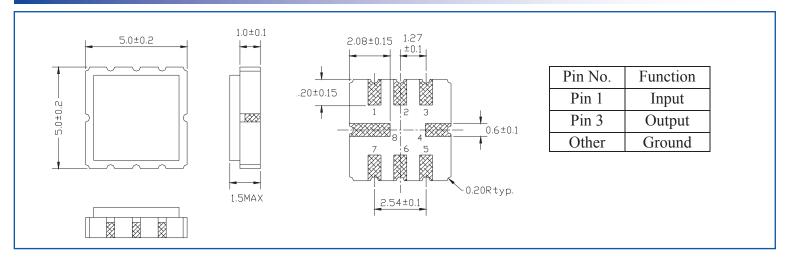

TAPE AND REEL: 1,000pcs/reel

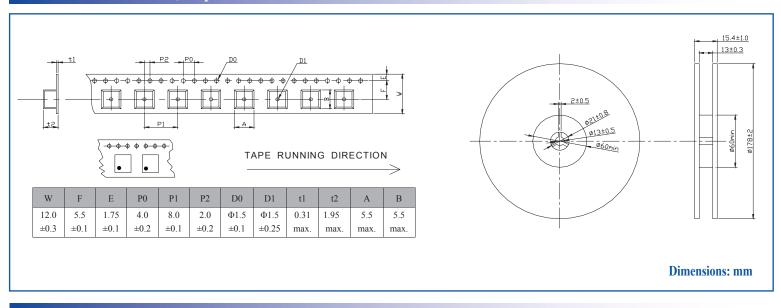

REFLOW PROFILE:

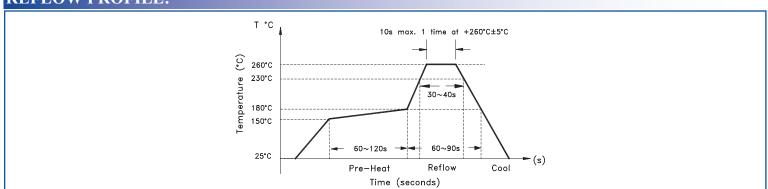

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



