


# SMD ONE PORT 315.0 MHz SAW RESONATOR

ASR315S2

APPLICATION: Automotive Electronics/Remote Control



5 x 3.5 x 1.5mm

## STANDARD SPECIFICATIONS:

CHARACTERISTICS		UNIT	MIN.	TYP.	MAX.
Center Frequency Fo		MHz	314.925	315.000	315.075
Tolerance from Fo		KHz		±75	
Insertion Loss		dB	-	1.7	2.4
Quality Factor	Unloaded	-		12,200	
	50Ω loaded			1,500	
Temperature Stability	Turnover Temperature	°C	20	35	50
	Turnover Frequency	KHz		Fc	
	Freq. Temp. Coefficient	ppm/°C <sup>2</sup>		0.032	
Frequency Aging		ppm/year		±10	
DC Insulation Resistance		MΩ	1.0		
RF Equivalent RLC Model	Motional Resistance R <sub>1</sub>	Ω		14	25
	Motional Inductance L <sub>1</sub>	μH		86	
	Motional Capacitance C <sub>1</sub>	fF		2.95	
	Shunt Capacitance C <sub>0</sub>	pF		2.4	
Operating temp.		°C	-45°C to +85°C		
Storage temp.		°C	-45°C to +85°C		
Max. Rating	DC voltage	V	±10V		
RF Power Dissipation		dBm	0		

(\*) Option 75 for ± 0.075MHz


Data measured with: Source Impedance: Z<sub>s</sub>=50Ω, Load Impedance: Z<sub>L</sub>=50Ω, T<sub>A</sub>=25°C  
Electrostatic Sensitive Device. Handle with precaution.

## MARKING:

- 315R (315.0 Frequency in MHz)
- A ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004; X: Traceability code)


PIN NO.	CONNECTIONS
1	Input/Output
2	GND
3	Output/Input
4	GND

## FREQUENCY RESPONSE:

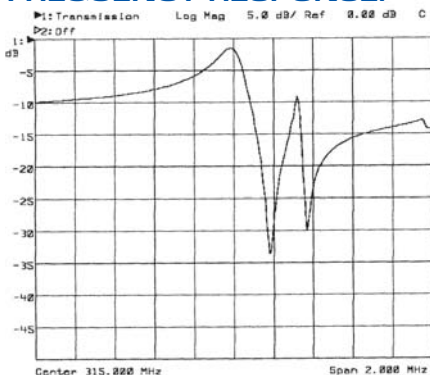

## TEST CIRCUIT:

## OUTLINE DRAWING:

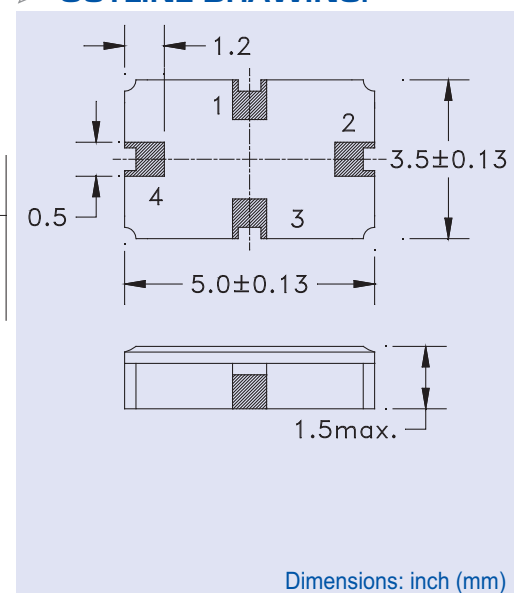

Dimensions: inch (mm)

ABRACON IS  
ISO 9001 / QS 9000  
CERTIFIED



30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)