

5.0 x 3.2 x 1.3 mm

MICROPROCESSOR CRYSTALS ULTRA MINIATURE CERAMIC SURFACE MOUNT ABM3C

FEATURES:


- Ultra miniature size 5.0 x 3.2 x 1.3 mm max.
- Suitable for reflow.
- Ceramic package with heat-resistant glass sealing.
- Fundamental mode.
- Tight Stability available.

APPLICATIONS:


- Cellular telephones, Pagers.
- Communication, Test equipment.
- High density applications.
- Cordless telephones, Fascimiles

STANDARD SPECIFICATIONS

Frequency Range	10.000MHz - 40.000MHz
Operation Mode	Fundamental
Operating Temperature	-10°C to +70°C (See Options)
Storage Temperature	-40°C to +85°C
Frequency Tolerance @ 25°C	±50ppm max. (See Options)
Frequency Stability over Temp.	±50ppm max. (See Options)
Equivalent Series Resistance (ESR) Maximum	60 Ω max. for 10.0MHz ≤ F < 16.0MHz 50 Ω max. for 16.0MHz ≤ F ≤ 40.0MHz
Shunt Capacitance C ₀	7pF max.
Load Capacitance C _L	18pF (See Options)
Drive Level	100μW max., 10μW correlation
Aging @ 25°C First Year	±5ppm max.
Insulation Resistance	500MΩ min. at 100Vdc ±15V

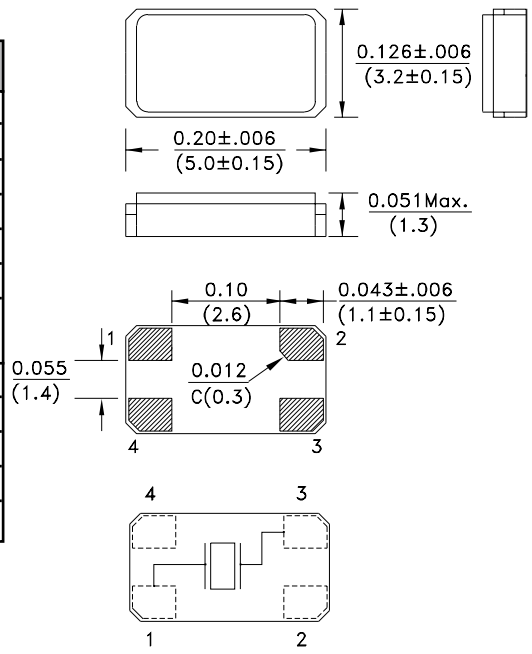


TOP VIEW
Recommended land pattern

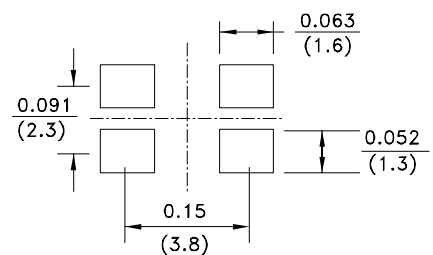

Dimensions: Inches (mm)

Environmental, and mechanical specifications, see appendix C. Group 2.
Tape and Reel, see appendix H.(1,000 pcs/reel)
Marking, see appendix G. Reflow profile, see appendix E.
Application notes, see appendix A. Recommended handling, see appendix F.

ORDERING OPTIONS

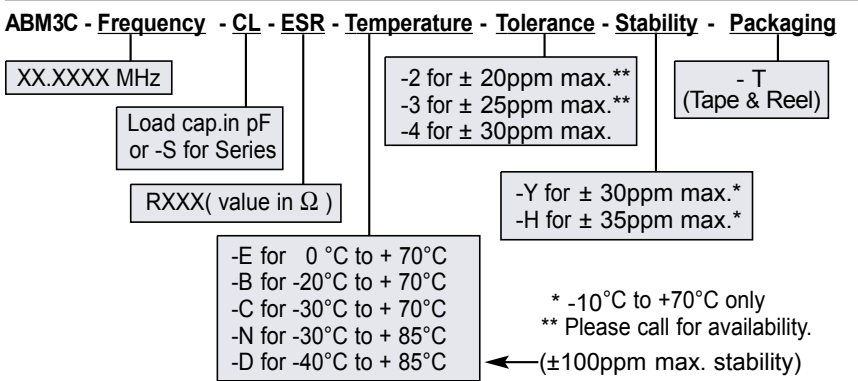

NOTE: Left blank if standard • All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA
(949) 448-7070 • FAX: (949) 448-8484

E-MAIL: abinfo@abracon.com • INTERNET ADDRESS: www.abracon.com

