


# Mini Drum Core Inductor

AIUR-01 Series



RoHS  
Compliant



7.5 x φ8.0 mm

## FEATURES:

- Ferrite core with heat shrink tube
- High Reliability

## APPLICATIONS:

- Electronic Appliance
- Automotive system

## STANDARD SPECIFICATIONS:

### PARAMETERS

ABRACON P/N:	AIUR-01 Series
Operating temperature:	-25°C to + 85°C
Storage temperature:	-25°C to + 125°C

Part Number	Inductance	Tolerance	Q (Min)	DCR (Max)	Saturation Current (Max)	SRF (Min)
Units	μH	%		Ω	mA	MHz
Symbol	L	K		DCR	Isat*	
AIUR-01-101	100	K	60	2	200	9.0
AIUR-01-121	120	K	60	3	200	9.0
AIUR-01-151	150	K	60	3	200	9.0
AIUR-01-181	180	K	60	3	200	9.0
AIUR-01-221	220	K	60	3	150	9.0
AIUR-01-271	270	K	60	3	150	9.0
AIUR-01-331	330	K	60	4	150	9.0
AIUR-01-391	390	K	60	4	100	9.0
AIUR-01-471	470	K	60	5	100	9.0
AIUR-01-561	560	K	60	6	100	9.0
AIUR-01-681	680	K	60	6	100	9.0
AIUR-01-821	820	K	60	7	50	9.0
AIUR-01-102	1000	K	80	9	50	9.0
AIUR-01-122	1200	K	80	9	50	9.0
AIUR-01-152	1500	K	80	11	50	1.8
AIUR-01-182	1800	K	80	12	50	1.6
AIUR-01-222	2200	K	80	14	50	1.5
AIUR-01-272	2700	K	80	15	50	1.4
AIUR-01-332	3300	K	80	25	40	0.9
AIUR-01-392	3900	K	80	30	40	0.9
AIUR-01-472	4700	K	80	32	40	0.8
AIUR-01-562	5600	K	80	36	30	0.7
AIUR-01-682	6800	K	80	40	30	0.7
AIUR-01-822	8200	K	80	45	30	0.6
AIUR-01-103	10000	K	60	55	20	0.6
AIUR-01-123	12000	K	60	65	20	0.5
AIUR-01-153	15000	K	60	80	20	0.5

## Test Conditions and equipments

Test frequency: 100KHz 0.1Vrms

DCR: QuadTech Milliohmmeter

Isat: 10% inductance drops from initial value

ABRACON IS  
ISO 9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

Revised: 10.10.11

# Mini Drum Core Inductor

AIUR-01 Series



RoHS  
Compliant



7.5 x  $\phi$ 8.0 mm

## ➤ OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

AIUR-01-


### Inductance Code

Please refer to the  
Electrical Spec Table

### Tolerance

K:  $\pm 10\%$

## ➤ OUTLINE DRAWING:

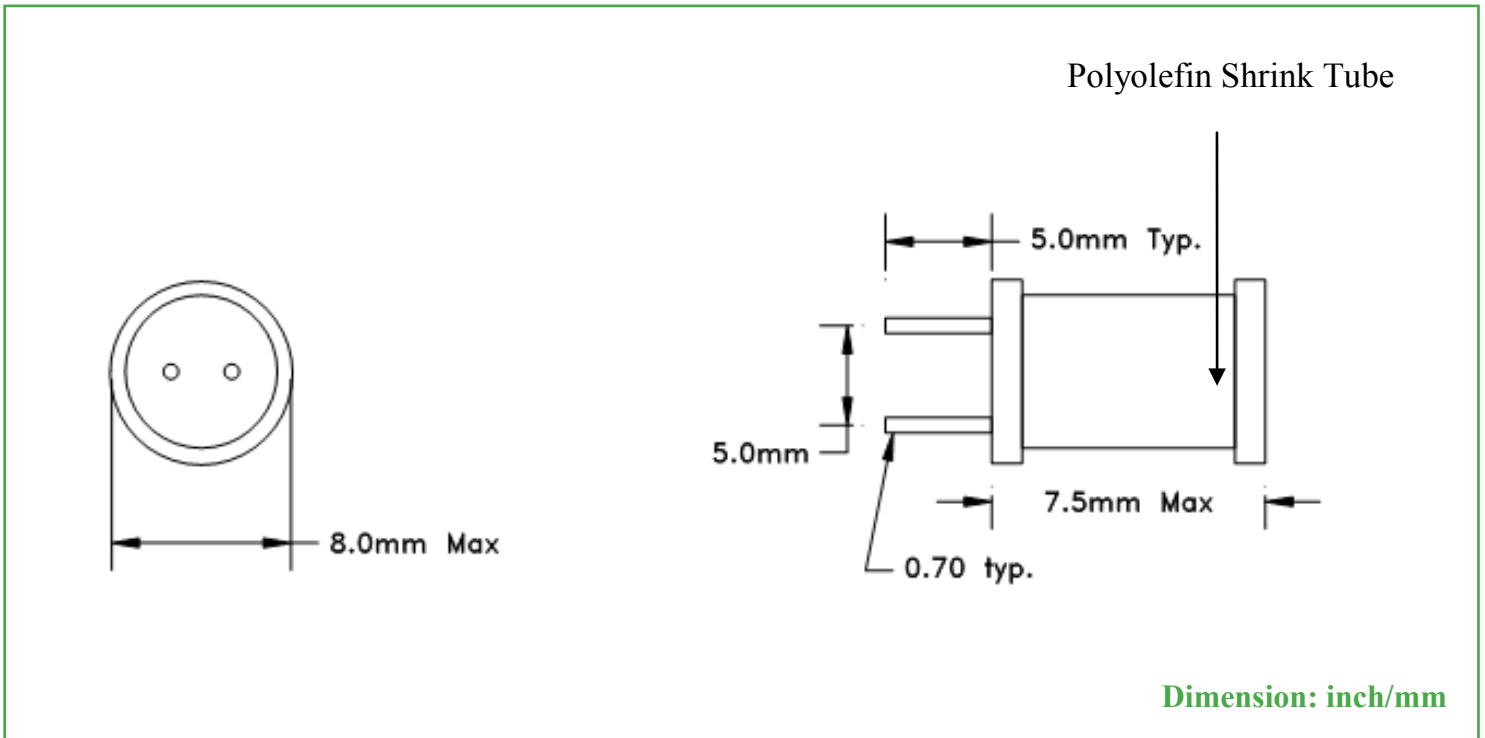

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale

Revised: 10.10.11

30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-800 | [www.abracon.com](http://www.abracon.com)